

FEATURES :

- 24PIN DIL PACKAGE
- Low Ripple & Noise
- High Efficiency up to 85%
- Regulated Output Types
- Internal SMD Construction
- Operating Temperature:-40°C TO +85°C
- Industry Standard Pinout

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency
	Vdc	mA	%Typ
54D-XXS05CN	5	600	65
54D-XXS09CN	9	333	70
54D-XXS12CN	12	250	75
54D-XXS15CN	15	200	80
54D-XXS24CN	24	125	80
54D-XXD05CN	±5	±300	65
54D-XXD09CN	±9	±167	70
54D-XXD12CN	±12	±125	75
54D-XXD15CN	±15	±100	80
54D-XXD24CN	±24	±63	80

Note:

- 1."XX" Is Input Voltage: 05=5Vdc, 09=9Vdc, 12=12Vdc, 15=15Vdc, 24=24Vdc, 48=48Vdc.
 2.The input voltage increases, there will be an increase in efficiency.

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo,Io Nom			±10	%
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±3	%
Short Circuit Protection	Continuous				
Line Regulation	Regulated			±0.5	%
Load Regulation	Regulated			±0.8	%
Ripple & Noise	Output:5-9V TYPES BW=DC To 20MHz			100	mVp-p
Ripple & Noise	Output:12-24V TYPES BW=DC To 20MHz			1% of Vout	mVp-p
Transient response setting time	50% load step change		350		us

YUAN DEAN SCIENTIFIC



DC-DC Converter

54D SERIES

3Watt


0.5KV Isolated

Single & Dual Output

DIL24



Temperature Derating Graph

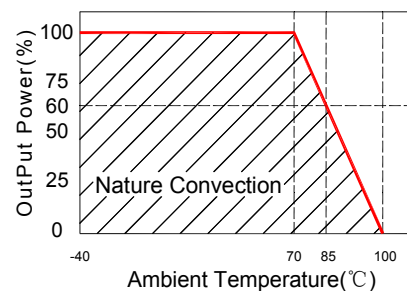

www.yds.com.tw




TEL : 886-6-3842899 FAX : 886-6-3843288
 E-MAIL : ydsweb@yds.com.tw

Rev:2 2018/10/11

General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load, nominal input		100		KHz
Operating Temperature		-40		+85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	Nickel Coated Copper With Non-Conductive Base				
MTBF	MIL-HDBK-217F@25°C	1500000			Hours
Weight			16.8		g
Dimensions		31.60x20.10x11.0			mm

Markings and Dimensions

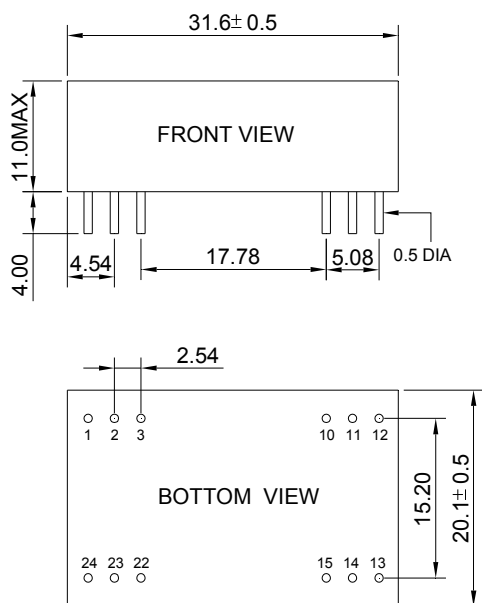



UNIT: mm Unless otherwise specified, all tolerances are ±0.25

Part Number


54D	-	05	S	05	C	N
A		B	C	D	E	F

A : Series
 B : Input Voltage
 C : Single(S);Dual(D)
 D : Output Voltage
 E : Types
 F : Package

Recommended Test Circuit

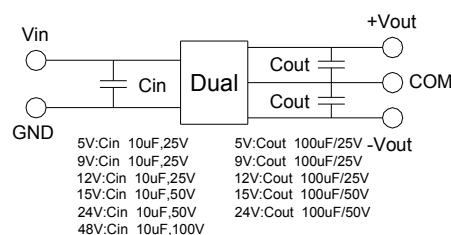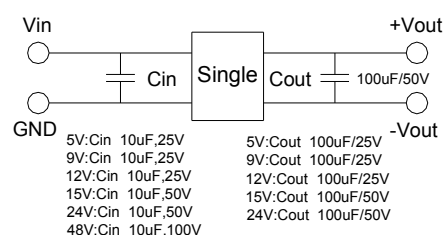

Packaging

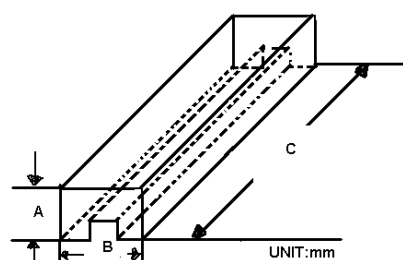

Size(mm)		
A	B	C
18.71	23.00	522

PIN Connection

PIN	1	2	3	10	11	12	13	14	15	22	23	24
Single	+Vin	NC	NC	-Vout	+Vout	-Vin	-Vin	+Vout	-Vout	NC	NC	+Vin
Dual	+Vin	-Vout	Com	Com	+Vout	-Vin	-Vin	+Vout	Com	Com	-Vout	+Vin

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288
 E-MAIL : ydsweb@yds.com.tw

Rev:2 2018/10/11