

FEATURES :

- Constant Current Output LED Driver
- Wide Input Voltage Range
- PWM Dimming and ON/OFF Control
- Short Circuit and Overtemp. Protected
- High efficiency up to 95%

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Input Range	Output Voltage	Output Current
	Vdc	Vdc	mA
LDA24-0.30	5-36	2-34	300
LDA24-0.35	5-36	2-34	350
LDA24-0.50	5-36	2-34	500
LDA24-0.60	5-36	2-34	600
LDA24-0.70	5-36	2-34	700

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom	5	24	36	Vdc
Filter	Capacitor		2.2		uF

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Output Voltage Range	Vin=36V	2		34	Vdc
Output Current Range	Vin - Vout >1.5~4.0V	300		700	mA
Output Current Accuracy	Vin=24V, 5 LEDS		±5	±8	%
Output Current Stability	Vin=24V, 1LED to 5 LEDS		±5	±10	%
Efficiency at full load				95	%
Capacitive Load				100	uF
Short Circuit Protection	Continuous				

PWM Dimming and ON/OFF Control (let it open if not use)

Remote ON/OFF	DC/DC ON	Open or 2.8V<Vc<6V
	DC/DC OFF(Shutdown)	Vc<0.3V
Remote pin current	Vc=5V	1 mA
Quiescent input current in Shutdown mode	Vin=24V, Vc <0.6V	400 uA
PWM frequency		0.2 10 KHz


YUAN DEAN SCIENTIFIC



LED Driver

LDA24 SERIES

Non-Isolated

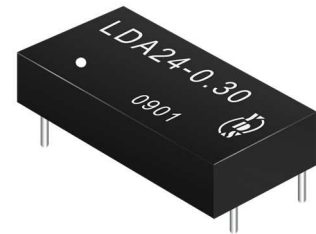


Part Number

L D A 24 - 0.30
A B C D E

- A : Series
- B : DC Input
- C : Package
- D : Input Voltage
- E : Output Current


Temperature Derating Graph

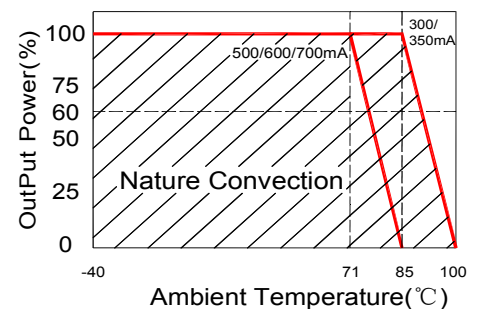

General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Operating Frequency	Full load, nominal input		800		KHz
Operation Temperature	300mA / 350mA	-40		+85	°C
	500mA/ 600mA/ 700mA	-40		+71	°C
Case Temperature				100	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Wave Soldering Profile	265°C/10 sec MAX				
Potting Material	Epoxy (UL94-V0)				
MTBF	MIL-HDBK-217F@25°C		2000000		Hours
Case material	DAP				
Weight			4.5		g
Dimensions			22.1x12.55x8.5		mm

Markings and dimensions

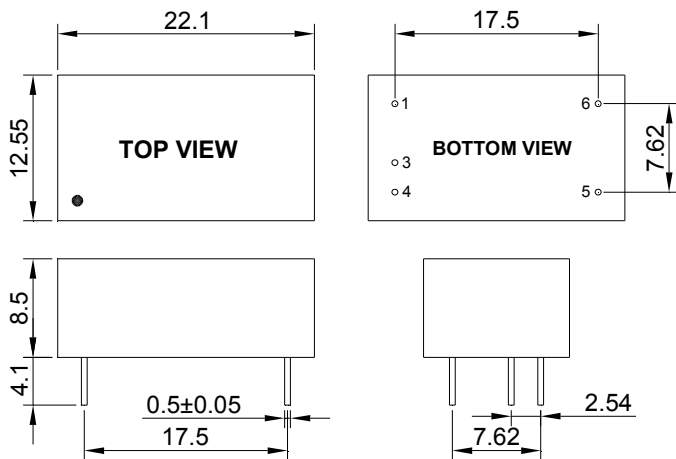


UNIT: mm

Unless otherwise specified, all tolerances are ±0.25

PIN Connection


Pin	1	3	4	5	6
Single	+Vin	PWM/ON/OFF	-Vin	-Vout	+Vout

PWM Digital Control Signal

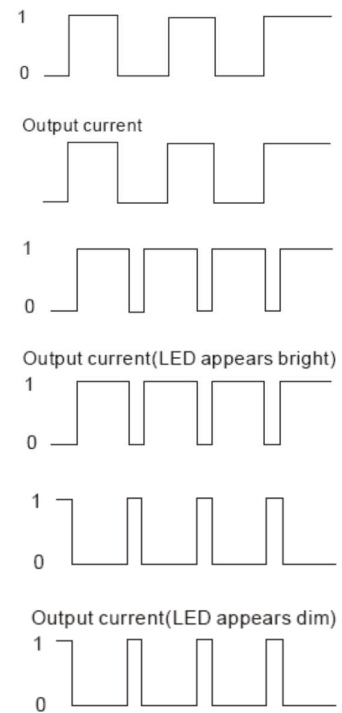

This is a PWM type digital dimming, which you can control the output current by adjusting the pulse width of the PWM signal.

PWM Dimming Control Circuit

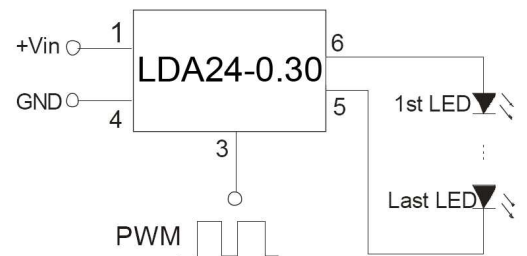

EMI Filter Circuit

